



EXPRES CUT S25

CE EN60974-7



| CODE | ↔ | | |
|-----------------|-----|-------|-----------------------|
| PAS204M-095-WB3 | 4 m | 12.5' | DIRECT 2 WIRES |

| TECHNICAL DATA | | |
|----------------|----------------|--------------|
| NO HF | EXPRES CUT S25 | |
| 1 m | 0,4 kg | 0,88 lb |
| V PEAK | 500 | |
| | 5 bar | |
| | 95 l/min | |
| X 60% | 25 A | |
| | 6-8 mm | 1/4" - 5/16" |

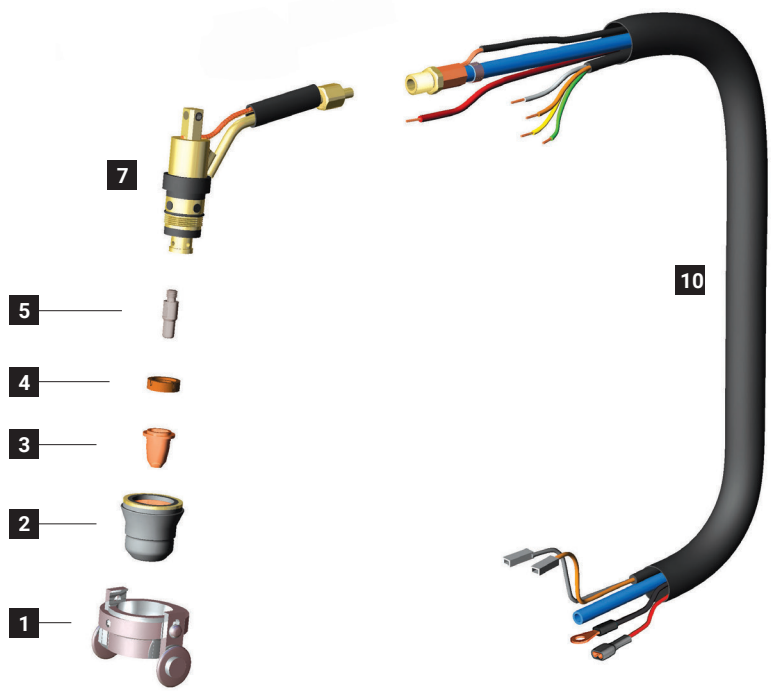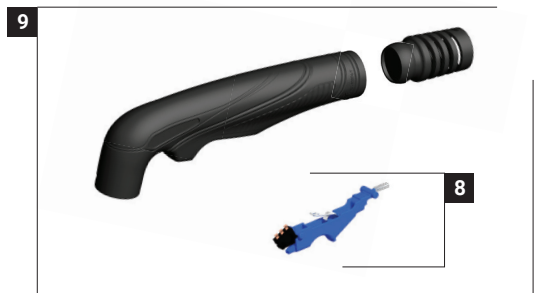

| | CODE | | Description | Ø | | ↔ | | CONTACT | | DRAG | | GOUGING | REF | |
|---|-----------|--|------------------|---------|-------|---------|--|---------|--|------|--|---------|-------|----|
| | | | | | | | | | | | | | | |
| 1 | CV0024 | | stand off guide | 23,5 mm | | 33 mm | | | | | | | | 1 |
| 2 | PC0116 | | nozzle (no ring) | | | 28 mm | | | | | | | 60389 | 4 |
| 3 | PD0103-09 | | 40 A | 0,9 mm | .035" | 25,8 mm | | | | | | | | 10 |
| 3 | PD0103-65 | | 20 A | 0,65 mm | .025" | 25,8 mm | | | | | | | | 10 |
| 3 | PD0116-06 | | 20 A | 0,6 mm | .023" | 17,3 mm | | | | | | | | 10 |
| 3 | PD0116-08 | | 30 A | 0,8 mm | .030" | 17,3 mm | | | | | | | | 10 |
| 3 | PD0116-09 | | 40 A | 0,9 mm | .035" | 17,3 mm | | | | | | | | 10 |
| 4 | PE0106 | | Swirl ring | | | 4,6 mm | | | | | | | 60028 | 2 |
| 5 | PR0106 | | electrode | | | 30,5 mm | | | | | | | | 10 |
| 5 | PR0110 | | electrode | | | 21,8 mm | | | | | | | | 10 |

| | CODE | | Description | |
|---|--------|--|------------------------------------|----|
| 7 | EA0330 | | o-ring | 10 |
| 7 | PF0127 | | S25K - S35K - S25 - S45 torch head | 1 |
| 8 | TP0310 | | trigger kit | 1 |

| | CODE | | Description | |
|----|--------|--|---|---|
| 9 | TP0301 | | handle kit | 1 |
| 9 | BW0424 | | spring joint | 1 |
| 10 | PH4016 | | cable assembly - 4 m / 12' - direct 2 wires | 1 |

STANDARD CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG GOUGING