

ERGOMEGA TW50

CE EN60974-7



CODE				
MA4503E030	3 m	10'		1
MA4503E040	4 m	12'		1
MA4503E050	5 m	16.4'		1

CODE				
MA4503E030A	3 m	10'		1
MA4503E040A	4 m	12'		1
MA4503E050A	5 m	16.4'		1

CODE	
AR0170	Tweco® 1-4 kit
AR0171	Tweco® 5 kit
AR0172	Lincoln® "L" kit
AR0173	Miller® "M" kit

CODE	
AR0176	Lincoln® "L4" kit
AR0177	Lincoln® "L2" kit
AR0178	Lincoln® "L3" kit
AR0179	Lincoln® "L1" kit


Kit to be assembled by a qualified technician.
See the Kits for Connector relevant page.

TECHNICAL DATA		
ERGOMEGA TW50		
	1,65 Kg	3.64 lb
	113	
	113	
	0,8 ÷ 1,6 mm	.030" ÷ 1/16"
	500A CO2 - 450A Mix	

MIG
Standard equipment
in all torch packages




MT0566

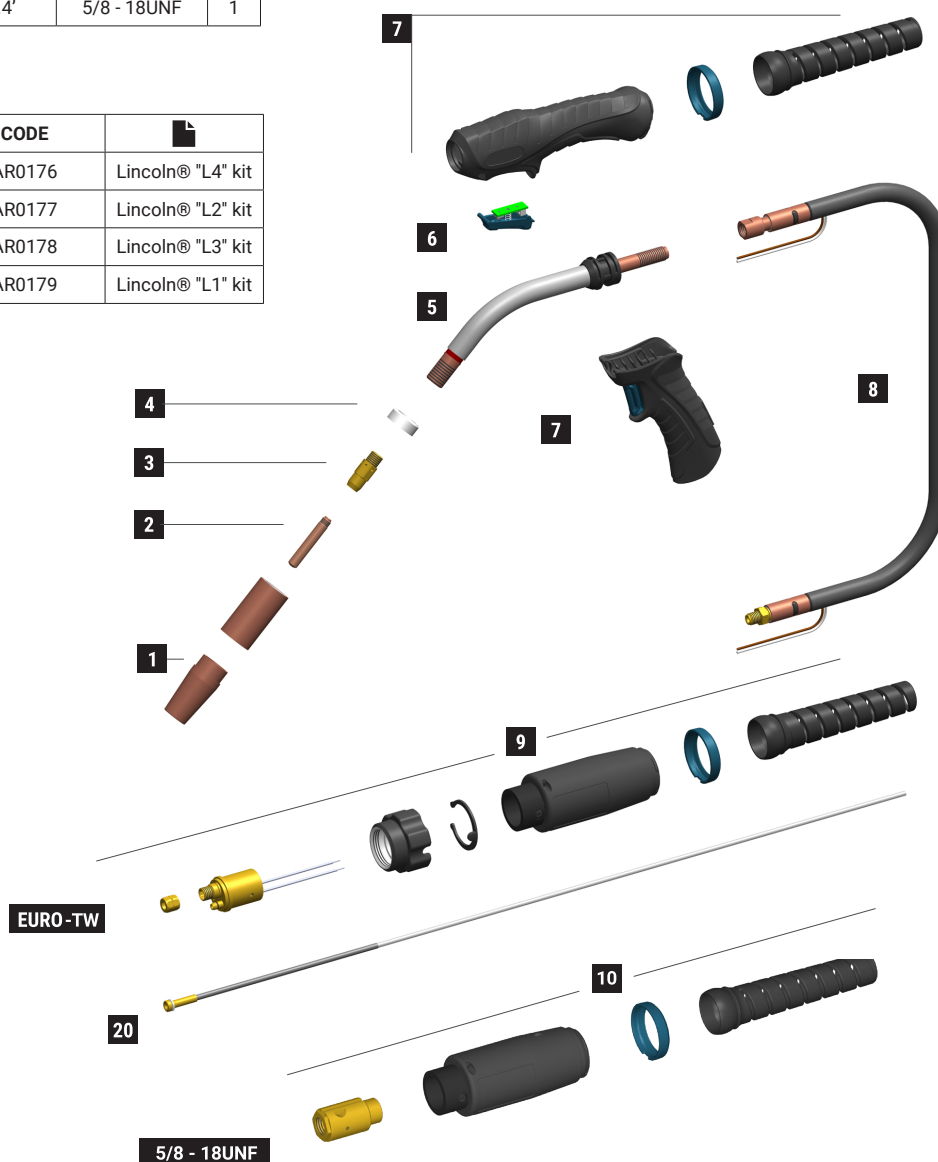

	CODE			Ø				REF	
1	MC0280		nozzle	13 mm	1/2"	44,5 mm	1"-15/16	25CT-50	10
1	MC0281		nozzle	19 mm	3/4"	44,5 mm	1"-15/16	25CT-75	10
1	MC0282		nozzle	16 mm	5/8"	44,5 mm	1"-15/16	25CT-62	10
1	MC0283		nozzle insulator			49 mm	1"-15/16	35CT	10
2	MD0010-09		5/16-24 UNF - Cu	0,9 mm	.030"	50 mm	1" 31/32	15H35	20
2	MD0010-12		5/16-24 UNF - Cu	1,2 mm	.045"	50 mm	1" 31/32	15H45	20
2	MD0010-14		5/16-24 UNF - Cu	1,4 mm	.040"	50 mm	1" 31/32	15H52	20
2	MD0010-16		5/16-24 UNF - Cu	1,6 mm	1/16"	50 mm	1" 31/32	15H116	20
3	ME0021		5/16-24 UNF - brass			35 mm	1"-3/8	55	10
20	GM0013		grey steel liner for EURO-TW connector	1,2 ÷ 1,6 mm	.045" ÷ 1/16"	5 m	16.4'	44-116-15	1

	CODE			
4	BW1391-SP		front insulator	3
5	MF1548-SP		Ergomega 50 torch head	1
6	MT0563		trigger kit	1
7	MT0577		handle kit	1
7	MT0566		pistol grip	1
8	MH0842-030-SP		coaxial cable - 3m / 10'	1
8	MH0842-040-SP		coaxial cable - 4m / 12'	1

	CODE			
8	MH0842-050-SP		coaxial cable - 5m / 16.4'	1
9	AR0083		Euro-Tw connector	1
9	BW0020		Euro metal nut	10
9	FA0027		Euro-Tw nut	10
9	MT0565		back box kit Euro	1
10	FB0395-SP		5/8-18UNF power connector	1

CODE	X(mm)	Y(mm)	Z(°)	
MF1548-SP	193	110	45	